


**Characteristics:**


- ① The fan is made of metal support, built-in centrifugal fan and ABS plastic cover. It is widely applied to electrical products and cabinets.
- ② Centrifugal top ventilator can exhaust heat load with high efficiency.
- ③ It can work under electromagnetic environment, meanwhile, it won't interfere the system or equipment where it installed.
- ④ Running temperature/humidity: (unconcretionary)  
Temperature: -30°C ~ +80°C Humidity: 0% ~ 95%
- ⑤ RAL 7035 grey is the standard color, can be changed to RAL 7032.
- ⑥ Protection class: E N 60 5 29 I P 33 / IP54 (not suitable for outdoor equipment).

|   |                                              |
|---|----------------------------------------------|
| ① | ABS                                          |
| ② |                                              |
| ③ |                                              |
| ④ | / -30 ~ +80                                  |
| ⑤ | 0% ~ 95%                                     |
| ⑥ | RAL7035 RAL7032<br>E N 60 5 29 I P 33 IP 5 4 |

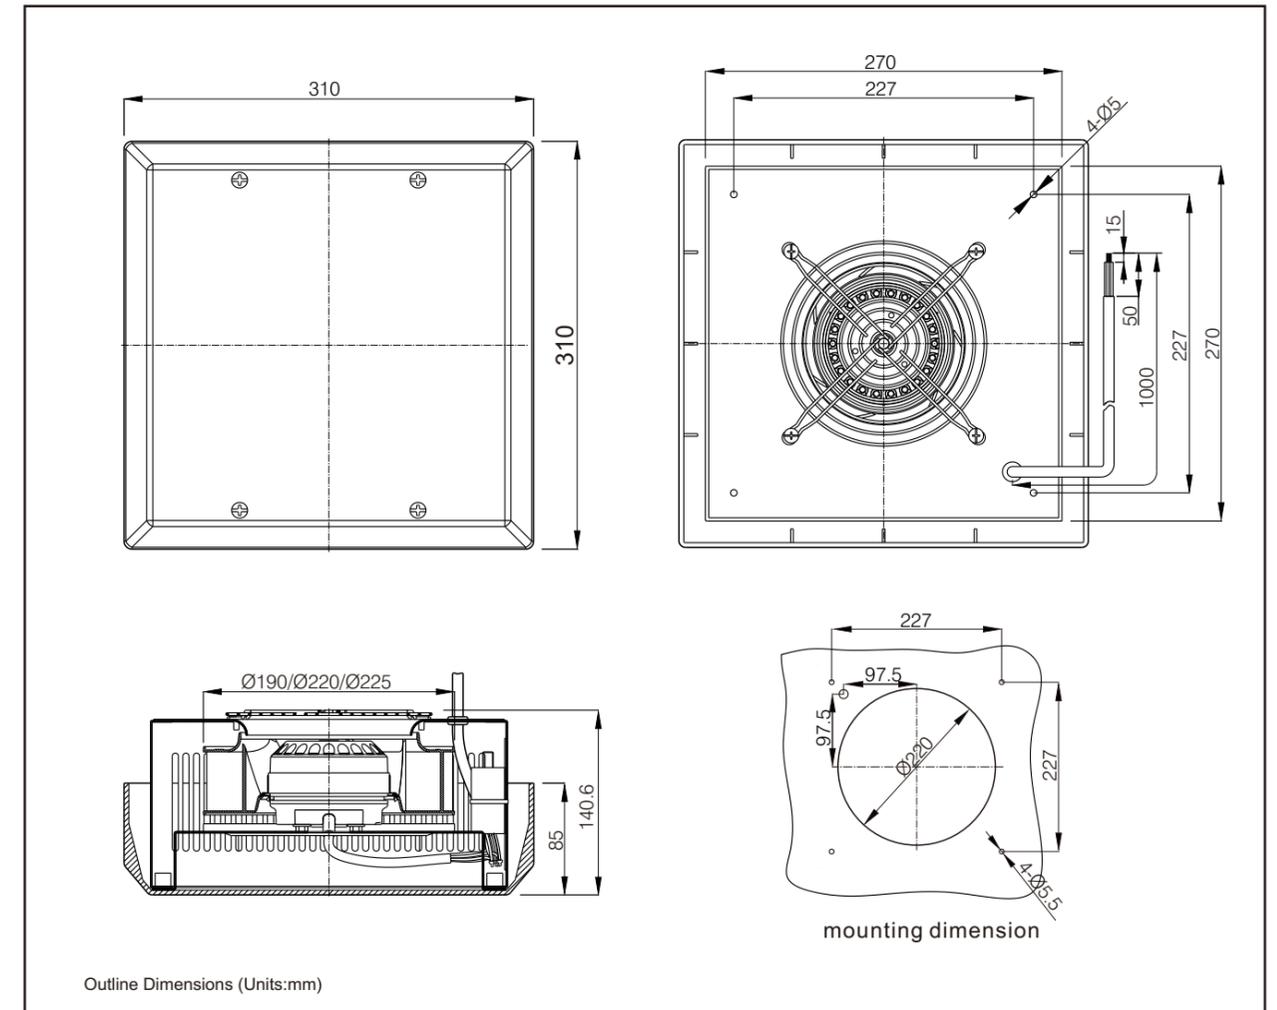

- Ⓐ installation: Screw-fix installation
- Ⓑ Power connection: wire connection
- Ⓒ Maximum weight: 4.56kg

- Ⓐ
- Ⓑ
- Ⓒ 4.56kg

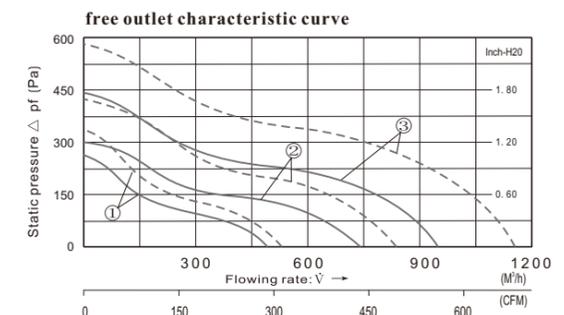

**Parameters**

| Type         | Fan Model   | Rated Voltage | Speed     | Frequency | current | Power                      | Max Air Flow | Static Pressure | Noise | Curve | external dimensions |
|--------------|-------------|---------------|-----------|-----------|---------|----------------------------|--------------|-----------------|-------|-------|---------------------|
|              |             | V             | V         | Hz        | (A)     | (W) <sub>10%<br/>20%</sub> | m3/h         | (Pa)            | (dB)  |       | (mm)                |
| FJK190PB-230 | C2E-190.45A | 230 AC        | 150...250 | 50        | 0.26    | 58                         | 484          | 265             | 57    | ①     | 310x310x140         |
|              |             |               |           | 60        | 0.33    | 74                         | 527          | 335             | 59    |       |                     |
| FJK220PB-230 | C2E-220.44B | 230 AC        | 150...250 | 50        | 0.46    | 98                         | 730          | 300             | 60    | ②     |                     |
|              |             |               |           | 60        | 0.51    | 118                        | 830          | 440             | 62    |       |                     |
| FJK225PB-230 | C2E-225.63C | 230 AC        | 150...250 | 50        | 0.60    | 131                        | 1020         | 430             | 62    | ③     |                     |
|              |             |               |           | 60        | 0.74    | 170                        | 1140         | 585             | 64    |       |                     |